

Crystal LTD TM SPEC Form

www.crystalltherm.com

Customer


PO#

PO date

Thermoelectric module (TM) specification

PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing	
			short time	continuous operation	Imax, A	Umax, V	Qmax, W	dTmax, K	Rac, Ohm	Tolerance ±, %	A1/A2	B1/B2	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm		
1	2-199-10-13-L2	138	130	115	3.0	16.1	18.4	92	5.56	10	30/20	30/20	6.10	0.02	24	100	5		

Clamping force: 8.7 - 17.4 kg

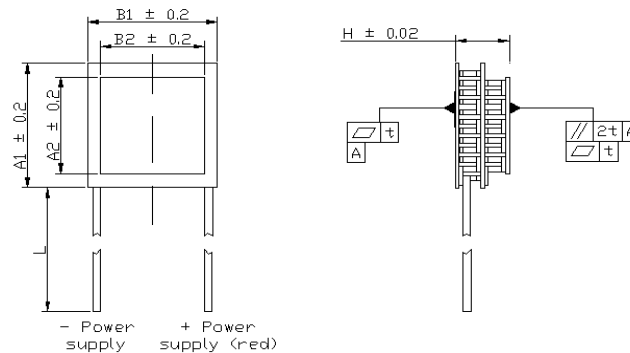

www.crystalltherm.com

Max dT is reduced by 3-4K for silicon sealed and 2-3K for epoxy sealed versions.

