

Crystal LTD TM SPEC Form

www.crystaltherm.com

Customer


PO#

PO date

Thermoelectric module (TM) specification


PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing
			short peak	continuous operation	I _{max} , A	U _{max} , V	Q _{max} , W	dT _{max} , K	Rac, Ohm	Tolerance ±, %	A/A1	B	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm	
1	S-023-065-10-Mch	138	130	115	2.0	2.9	3.7	72.5	1.10	10	8.8/10.8	6.6	1.68	0.2	30	100	5	
	both sides metallized																	solid tinned uninsulated

Clamping force: 0.5 - 2.3 kg

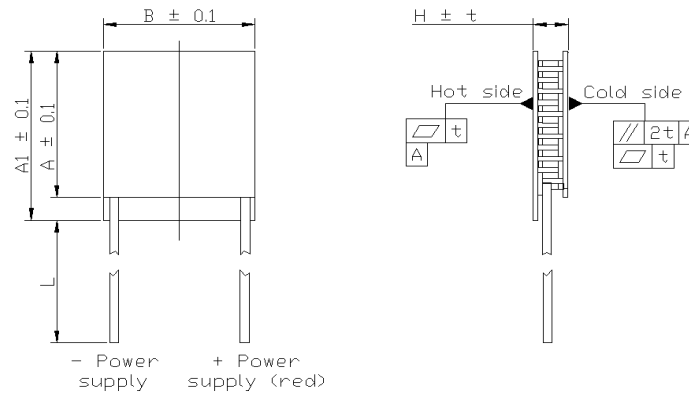

www.crystaltherm.com

Max dT is reduced by 2-3K for silicon sealed and 1-2K for epoxy sealed versions.

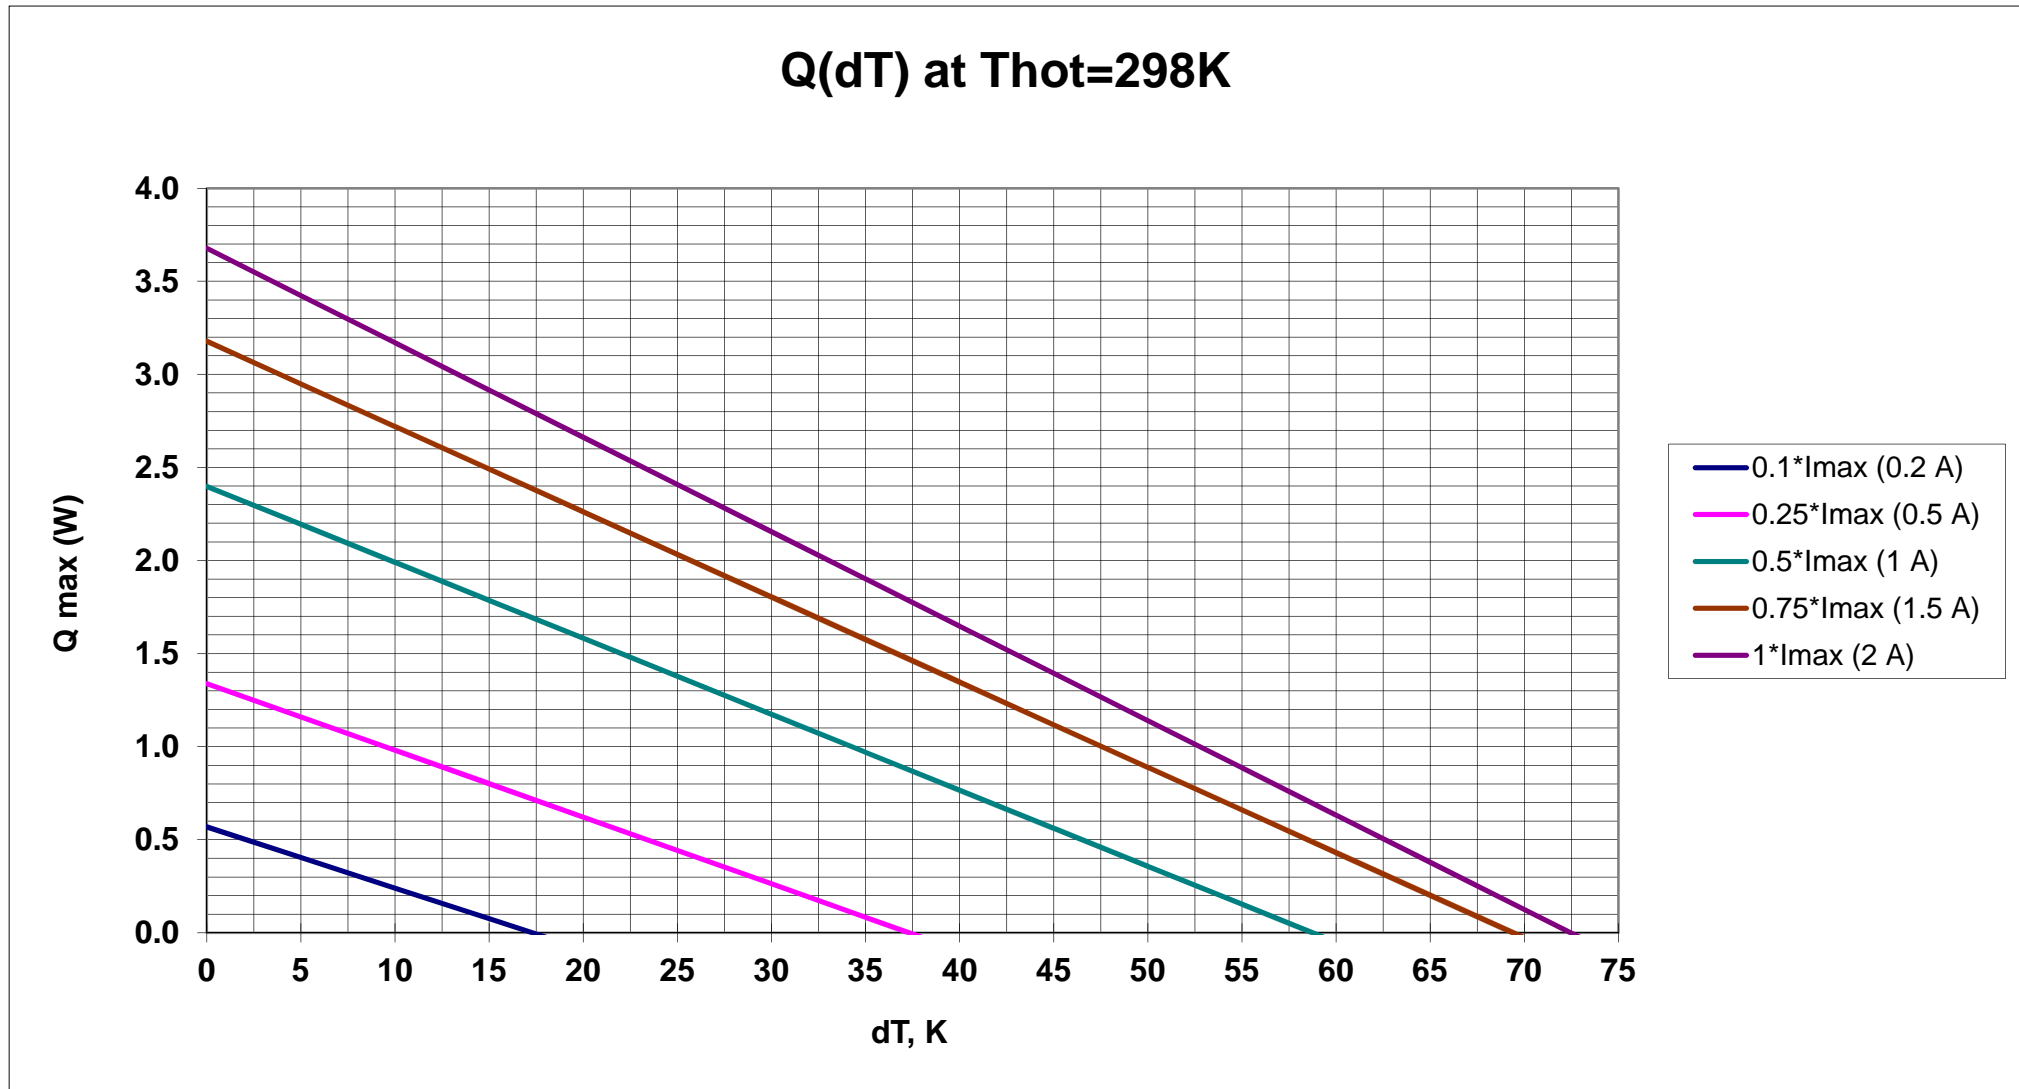

U(dT) at Thot=298K

