

Crystal LTD TM SPEC Form

www.crystalltherm.com

Customer


PO#

PO date

Thermoelectric module (TM) specification

PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing	
			short time	continuous operation	Imax, A	Umax, V	Qmax, W	dTmax, K	Rac, Ohm	Tolerance ±, %	A1/A2	B1/B2	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm		
1	2-176-14-15-L2	138	130	115	5.4	16.1	21.5	99	3.10	10	40/40	40/40	7.20	0.02	22	100	5		
															PVC				

Clamping force: 11.8 - 23.7 kg

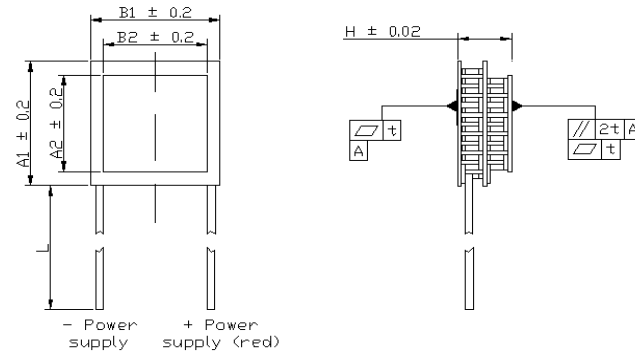

Max dT is reduced by 3-4K for silicon sealed and 2-3K for epoxy sealed versions.

