

Crystal LTD TM SPEC Form

www.crystalltherm.com

Customer


PO#

PO date

Thermoelectric module (TM) specification

PO position #	TM	Internal Solder Melting Temp, C	Max operating temperature, °C		Parameters in vacuum at hot side temperature 25 °C				Rac at 25 °C		Ceramic size, mm		TM Height		Wire			Sealing
			short time	continuous operation	I _{max} , A	U _{max} , V	Q _{max} , W	dT _{max} , K	Rac, Ohm	Tolerance ±, %	A1/A2	B1/B2	Height, mm	Tolerance t, ± mm	S, AWG #	Length, mm	Tolerance ±, mm	
1	2-192-1420-11118-L2	138	130	115	7.9	16.6	46.0	95	2.17	10	40/40	40/40	8.10	0.02	20	100	5	

Clamping force: 31.4 - 62.8 kg

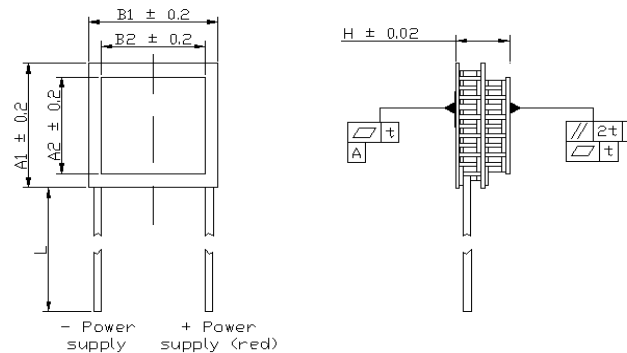

Max dT is reduced by 2-3K for silicon sealed and 1-2K for epoxy sealed versions.

Q(dT) at $T_{hot}=298K$

